




Air Lube & Lift Services Pty. Ltd.

5 Sonia Street. P.O Box 8314
 Carrum Downs, Victoria 3201
 Tel: 9775 1688 Fax: 9775 1992
 Email: sales@austank.com.au
 Web: www.austank.com.au

DATA SHEET **SELF BUNDED STORAGE TANKS**

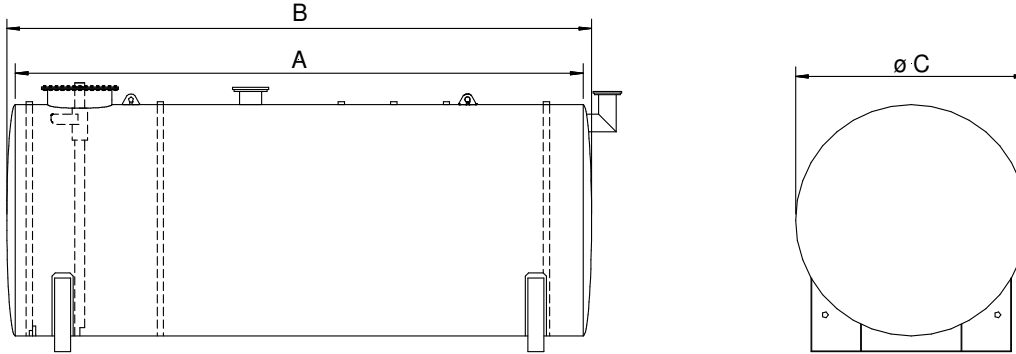

Type	Safe Fill Level	Actual Capacity Litres	Dimensions - Millimetres					Weight Kg (nom)
			A	B	C	Material		
						Body	End	
2.5	2,400	2,530	2440	2,550	1,150	3	3	534
5	4,700	4,950	3000	3,150	1,450	3	3	837
*** 5	5,640	5,940	3,600	3,750	1,450	3	3	850
7.5	7,000	7,430	4500	4,650	1,450	3	3	1,159
10	10,000	11,300	3,000	3,150	2,190	6	6	2,396
15	15,000	16,950	4,500	4,650	2,190	6	6	3,126
20	20,000	22,600	6,000	6,500	2,190	6	6	3,856
30	30,000	32,070	5,400	5,900	2,750	6	6	5,315
40	39,500	41,580	7,000	8,000	2,750	6	6	6,002
55	54,170	57,020	9,600	10,100	2,750	6	6	7,101
70	67,710	71,280	12,000	12,500	2,750	6	6	8,934
90	89,840	94,570	10,000	10,450	3,470	8	8	11,773
110	104,360	109,860	11,750	12,200	3,470	8	8	14,598

Weights, Capacities & Dimensions are nominal only

*** 5 and above, all require Overfill Protection, Anti Siphon Valve, Spill Pot and Audible Alarm

Note: all fittings exit from the tank top (above the safe fill level) as per AS 1940, therefore a suction pump is required to draw product out of Self Bunded Tanks

Features:

Lifting Lugs

Identification plate and Compliant Signage

Tanks are designed, manufactured and tested to AS 1692 & AS 1940

Tanks are supplied chemical cleaned or blasted, primed and painted

A full range of accessories and options are available such as: remote fill, alternate cradle heights and fittings, electronic fuel monitoring, larger manways, level indicators and additional Signage

Bowers and pumps are also available

"The Steel Tank Specialists"