




Air Lube & Lift Services Pty. Ltd.

5 Sonia Street.
Carrum Downs, Victoria 3201
Tel: 9775 1688 Fax: 9775 1992
Email: sales@austank.com.au
Web: www.austank.com.au

DATA SHEET **ON GROUND STORAGE TANKS**

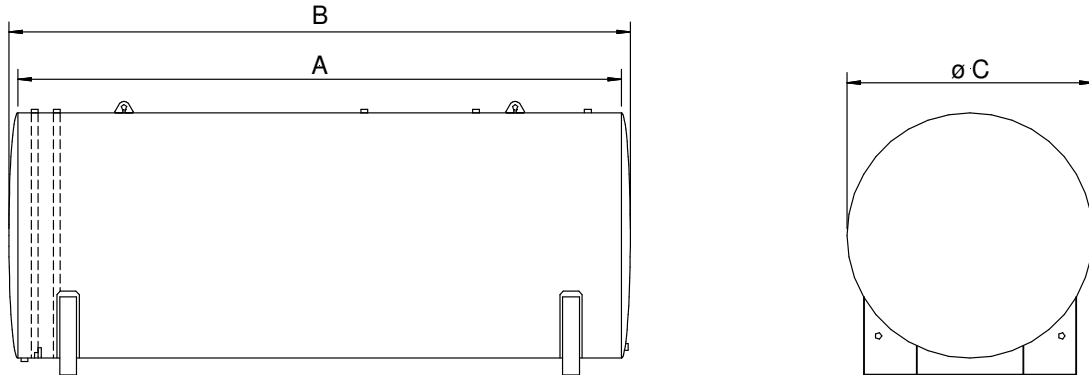

Type	Safe Fill Level	Actual Capacity Litres	Dimensions - Millimetres					Weight Kg (nom)
			A	B	C	Material		
						Body	End	
1.2	1,180	1,250	1200	1,350	1,150	3	3	200
2.5	2,400	2,530	2440	2,550	1,150	3	3	282
5	4,700	4,950	3000	3,150	1,450	3	3	438
*** 5	5,640	5,940	3,600	3,750	1,450	3	3	560
7.5	7,000	7,430	4500	4,650	1,450	3	3	600
10	10,000	11,300	3,000	3,150	2,190	5	5	1,560
15	15,000	16,950	4,500	4,650	2,190	5	5	2,050
20	20,000	22,600	6,000	6,500	2,190	5	5	2,540
30	30,000	32,070	5,400	5,900	2,750	5	5	3,520
40	39,500	41,580	7,000	8,000	2,750	6	6	4,000
55	54,170	57,020	9,600	10,100	2,750	6	6	4,730
70	67,710	71,280	12,000	12,500	2,750	6	6	5,950
90	89,840	94,570	10,000	10,500	3,470	8	8	8,210
110	104,360	109,860	11,750	12,200	3,470	8	8	11,270
125	121,280	127,670	13,500	14,000	3,470	8	8	
250	241,740	254,470	16,000	16,500	4,500	10	10	

Weights, Capacities & Dimensions are nominal only

Single Skin Tanks from ***5,000 ltrs will require compliant bunding, sufficiently large enough to contain the tank contents

Features:

Lifting Lugs

Identification plate and Compliant Signage

Tanks are designed, manufactured and tested to AS 1692 & AS 1940

Ladder & Platforms designed and manufactured to AS 1657 - 1992

Tanks are supplied chemical cleaned or blasted, primed and painted

A full range of accessories and options are available such as: alternate cradle heights and fittings, electronic fuel monitoring, larger manways, level indicators and additional Signage

"The Steel Tank Specialists"